

# STEREOTECH 1200

AM-FM STEREO RECEIVER

McIntosh

The Compendium



**FRONT PANEL:** Black glass and gold anodized aluminum panel. Meters: TUNING and SIGNAL STRENGTH. Illuminated tuning dial. AFL light. FM MPX light. Tuning control. ⚡ INPUT SELECTOR: AUX 1, AUX 2, AM, FM, PH 1, PH 2. Pushbutton switches: MODE: MONO or STEREO. TAPE 1: MONITOR or NORMAL. TAPE 2: MONITOR or NORMAL. MUTING: ON or OFF. LF: IN or OUT. HF: IN or OUT. COMP: LOUD or FLAT. SPEAKER 1: OFF or ON. SPEAKER 2: OFF or ON. HEADPHONES jack. Dual concentric BASS and TREBLE controls. BALANCE. VOLUME with on-OFF switch.



**BACK PANEL:** FUSE. Power cord. AC outlets: 1 SWITCHED, 1 UNSWITCHED. ↗ Output SPEAKERS push terminals: LEFT and RIGHT SPEAKER 1 and 2. ↗ LEFT and RIGHT jumpers: AMP IN and PREAMP OUT. ⚡ RECORDER: TAPE 2 OUT and MON, TAPE 1 OUT and MON. INPUTS: AUX 2, AUX 1, PH 2, PH 1. ANTENNA: 75 Ω FM ANTenna coax input. Push terminals for 300 Ω FM antenna, GND and AM. Built-in ferrite AM loopstick. GROUND screw terminal.

**AM SECTION:** Sensitivity 75uV IHF, S/N 50dB IHF, Distortion 1%, Response 20-3000Hz flat, Image rejection 60dB.

**FM SECTION:** Sensitivity 2.5uV, S/N 70dB IHF, Distortion 0.7% in stereo, Response 20-15kHz (+2.0 -2.0dB), Selectivity 55dB IHF, Spurious rejection 90dB IHF, Image rejection 70dB IHF, Stereo separation 35dB, SCA rejection 60dB.


**SPECIFICATIONS:** 50w/ch into 8 ohms. Response 20-20kHz (+1.0 -1.0dB). Distortion .2%. Noise and hum -95dB power amp, -89dB aux, -70dB phono. Damping factor 48. Input impedance: power amp 40k, aux 100k, phono 47k. Input sensitivity: power amp 1.2V, aux 0.35V, phono 3.0mV. Tone controls: bass and treble. +16 to -16dB.

# STEREOTECH 1200

AM-FM STEREO RECEIVER

# McIntosh

The Compendium

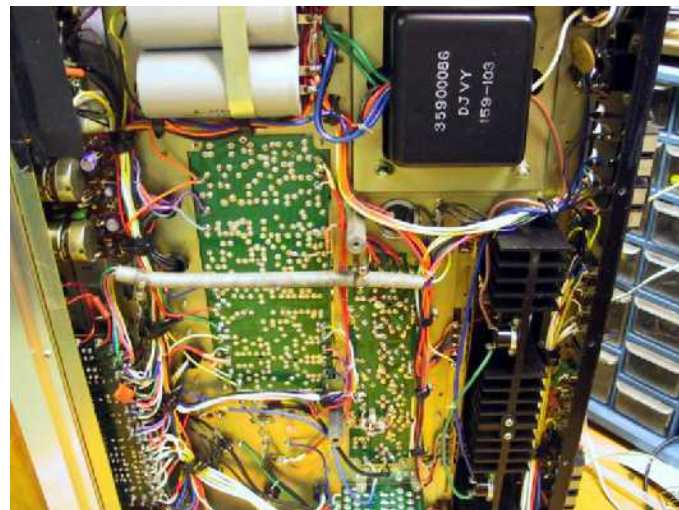

**OTHER:** Built by Foster Electric Company in Japan to McIntosh specifications.

**STEREOTECH 1200** - Sold from 1973 - 1976. S/N: BK001~????? (? , ??? UNITS)

Size: 5-5/32"H, 17-1/2"W and 15-7/8"D. Weight 33 lb. **\$599.00**