

AM/FM Stereo Tuner TU-1500RD



The TU-1500RD is an affordable AM/FM stereo tuner featuring highly sensitive reception performance and detailed, clear sound. The TU-1500RD is also intuitively easy to use and features an easy-to-read display. High sensitivity along with high selectivity ensures clear reception of your favorite stations, even in crowded urban areas.

- **Sophisticated Tuning Circuit Design**

The TU-1500RD has 4-stage variable capacitors in its front end to guarantee accurate tuning of station frequencies. Thanks to the use of a large-capacity microprocessor in the tuning section, reception drift is eliminated.

- **Low-impedance Output Circuit (100 ohms)**

The TU-1500RD employs a low-impedance output circuit that enables high quality signal transfer to the amplifier and ensures an open, transparent sound with minimal distortion in the high-frequency range. The low-impedance output circuit also protects the signal from externally-induced noise to further improve the sound quality.

- **RDS Radio Data System Functions**

The TU-1500RD provides a rich variety of RDS functions and is equipped with a Radio Text function that takes maximum advantage of the various Radio Data System (RDS) services. The name of the musical selection currently being heard, messages and any other text data that is broadcast by stations providing RDS services can be read on the tuner's display at up to 13 characters at a time.

- **Dot Matrix Display**

The TU-1500RD is equipped with a dot matrix display with greater resolution to ensure that RDS text and other alphanumeric characters are easy to read.

- **Rotary Knob for Improved Ease of Operation**

Up/Down tuning and search operations have evolved from archaic push buttons to a single rotating knob that is much easier to operate.

- **AM/FM 40-station Random Preset Memory**

The TU-1500RD offers random preset and recall of up to 40 stations stored in memory.

- **Highly Rigid Top Cover**

The TU-1500RD has been built with a highly rigid top cover that is impervious to external vibrations.

The TU-1500RD also features an attractive aluminum front panel that cosmetically matches the PMA-2000R and DMD-1000, as well as other Denon A/V components.

- **Optional 19" Rack Mount Kit - RM-356**

- **Optional Infrared Wireless Remote - RC-158**

SPECIFICATIONS

FM Section

Tuning Frequency	87.50 MHz-108.00 MHz
Usable Sensitivity (DIN)	0.9 μ V (15.3 dBf)
Signal-to-Noise Ratio (A-weighted)	Mono 82 dB, Stereo 78 dB
Total Harmonic Distortion	Mono 0.08%, Stereo 0.12%
Frequency Response	20 Hz - 15 kHz, (+0.5, -1.0 dB)
Stereo Separation	50 dB (1 kHz)

AM Section

Tuning Frequency Range	520 kHz - 1710 kHz
Usable Sensitivity	18 μ V
Signal-to-Noise Ratio	53 dB

General

AC 120 V, 60 Hz, 9 W

Dimensions


434 (W) x 75 (H) x 242 (D) mm

17.1" x 3.0" x 9.5"

Weight

3.5 kg, 7.7 lbs.

Design and specifications are subject to change for improvement without notice.

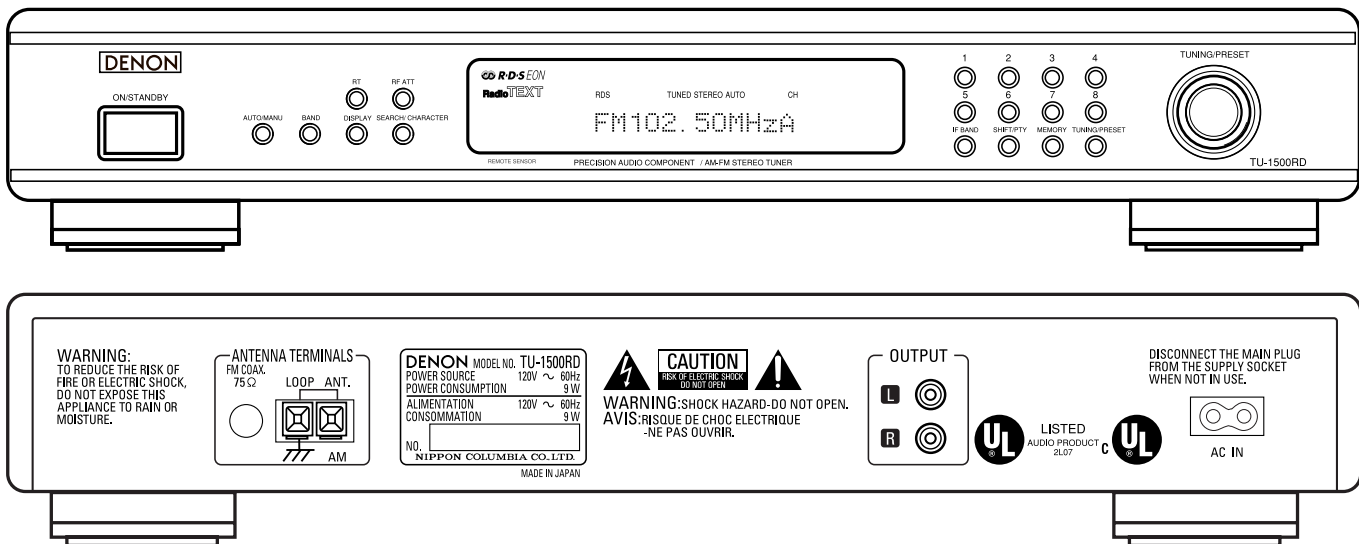

DENON

DENON ELECTRONICS

DIVISION OF DENON CORPORATION (USA)

222 NEW ROAD, PARSIPPANY, NEW JERSEY 07054-4200, U.S.A.

TEL : (973) 575-7810

www.del.denon.com

DENON CANADA, INC.

17 DENISON STREET, MARKHAM, ONTARIO, CANADA L3R 1B5

TEL: (905) 475-4085

NIPPON COLUMBIA CO., LTD.

14-14, AKASAKA 4-CHOME, MINATO-KU, TOKYO 107-8011, JAPAN

www.denon.co.jp

44790898 A Printed in the U.S.A.